

MacroRAM™

Affordable Benchtop Raman Spectrometer

ELEMENTAL ANALYSIS
FLUORESCENCE
GRATINGS & OEM SPECTROMETERS
OPTICAL COMPONENTS
CUSTOM SOLUTIONS
PARTICLE CHARACTERIZATION
RAMAN / AFM-RAMAN / TERS
SPECTROSCOPIC ELLIPSOMETRY
SPR IMAGING

Best in Class Raman Sensitivity and Software

The MacroRAM™ Raman spectrometer brings simplicity to Raman measurements without compromising the ability to handle even the most complex samples. Its compact and robust design makes it ideal for many environments, from undergraduate teaching labs to industrial QC applications.




Versatile Design

The MacroRAM includes a standard interlocked sample compartment for operator safety, and holders for cuvette-based liquid measurements, as well as a solid sample holder. A thermostatted cuvette holder is also available for temperature controlled measurements. Furthermore, a fiber port comes standard for probe-based Raman measurements outside of the sample compartment to accommodate larger, or irregularly shaped, samples and immersion probes.

Best in Class Sensitivity

The MacroRAM is based on a 120 mm focal length spectrograph, with a single aberration-corrected concave grating with a flat field output. The probe head has the highest quality Raman filters and is designed to optimize signal collection. Together with HORIBA's back-illuminated scientific CCD cooled to -50°C, the MacroRAM offers best in class sensitivity in an affordable package.

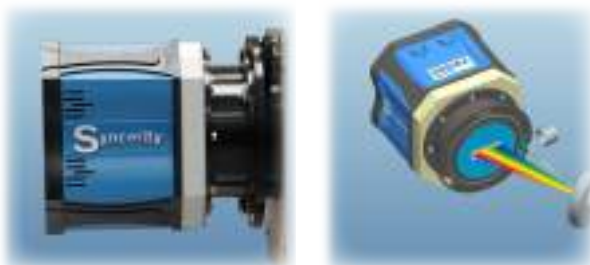

Compact and Rugged

With a footprint of just 17 x 17 inches, the MacroRAM is compact and fits on most lab bench spaces. With a fiber-based internal optical design, it has the robustness and portability to be moved between measurements and still be accurate.



Industry-leading LabSpec Software



The MacroRAM benefits from HORIBA's full-featured industry-leading LabSpec 6 software, which presents a simple and intuitive interface enabling logical work flow through experiments. LabSpec's intuitive interface overlays a powerful Raman engine with the most sophisticated data analysis and visualization tools, including multivariate analysis and database searching.

Specifications

Laser Wavelength	785 nm
Laser Power	Up to 450 mW (continuously variable under software control)
Spectral Range	100 to 3400 cm^{-1}
Spectral Resolution	8 cm^{-1} at 914 nm (Stokes)
Detection	Back-illuminated NIR CCD, cooled to -50°C , 80% QE at 800 nm
CCD Dark Current	0.05 $\text{e}^-/\text{pixel}/\text{second}$ (-50°C)
Dynamic Range	42550:1
Fiber Ports	Core diameter 100 μm , female FC/PC termination on housing
Fiber Ports (Numerical Aperture)	0.22
Safety	Class 1 internal sample compartment; Class 3B, external laser output port. Fully interlocked sample compartment with remote key switch to activate external laser output port.
Sample Handling, Internal	Cuvette and solid sample holders (standard); other accessories available
Sample Handling, External	Optional fiber probe for various external samples
Dimensions (W x D x H)	17 x 17 x 15 inches (432 x 432 x 381 mm)
Weight	45 lbs. (20.4 Kg)

Simple and Safe

The MacroRAM includes a USB port so it is easy to install and use. In fact, it works right out of the box! Collecting Raman data is as simple as plugging in the power cord, connecting the USB cable to the computer, and running LabSpec software! Furthermore, the MacroRAM includes an interlocked sample compartment so the user is never exposed to the laser, making it safe for use in most environments – from undergraduate labs to the factory floor.

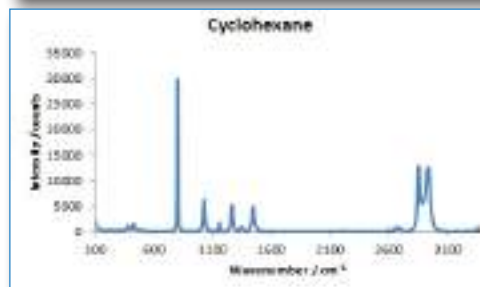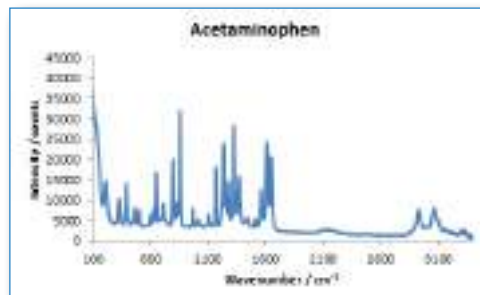

HORIBA
Scientific

info.sci@horiba.com

USA: +1 732 494 8660
UK: +44 (0)1604 542 500
China: +86 (0)21 6289 6060
Taiwan: +886 3 5600606

ramanacademy.com

France: +33 (0)1 69 74 72 00
Italy: +39 06 51 59 22 1
India: +91 80 41273637
Brazil: +55 (0)11 2923 5400

macroraman.com

Germany: +49 (0) 6251 8475 0
Japan: +81(75)313-8121
Singapore: +65 (0)6 745 8300
Other: +33 (0)1 69 74 72 00

